

Storage SuperServer SSG-542B-E1CR90

4U top-loading storage server with 90 hot-swap 3.5" SAS/SATA bays and PCIe 5.0



More details here

Key Applications

Big Data & Analytics, Data Lake, HPC and AI/ML Workloads, Telco & Cloud Service Providers, Financial Services & Healthcare Image Archives, Content Repositories, Government Data Protection,


Key Features

- Intel® Xeon® 6700/6500 series processors with P-cores or 6700 series processors with E-cores, Single Socket LGA-4710 (Socket E2) supported, CPU TDP supports Up to 350W TDP;
- Up to 16 DIMMs supporting up to 2TB DDR5-6400 in 1DPC or 2TB DDR5-5200 in 2DPC;
- Up to 1 PCIe 5.0 x8 HHHL + 3 PCIe 5.0 x16 HHHL slots;
- Up to 90 top-loading hot-swap 3.5"/2.5" SAS/SATA + 4 rear hot-swap 2.5" NVMe + 2 internal fixed 2.5" NVMe drive bays;
- 2 Redundant 2600W Titanium Level power supplies;
- 4U Rackmount chassis;




Form Factor	4U Rackmount Enclosure: 447 x 177 x 1099mm (17.6" x 6.96" x 43.3")
Processor	Single Socket E2 (LGA-4710) Intel® Xeon® 6700/6500 series processors with P-cores or 6700 series processors with E-cores P-cores: Up to 144C/144T; Up to 108MB Cache E-cores: Up to 144C/144T; Up to 108MB Cache
System Memory	Slot Count: 16 DIMM slots Max Memory (1DPC): Up to 2TB 6400MT/s ECC DDR5 RDIMM Max Memory (2DPC): Up to 2TB 5200MT/s ECC DDR5 RDIMM
Drive Bays Configuration	Default: Total 90 bays <ul style="list-style-type: none"> • 90 top-loading hot-swap 3.5"/2.5" SAS/SATA drive bays Option A: Total 4 bays <ul style="list-style-type: none"> • 4 rear hot-swap 2.5" PCIe 5.0 x4 NVMe* drive bays Option B: Total 2 bays <ul style="list-style-type: none"> • 2 internal fixed 2.5" PCIe 5.0 x4 NVMe* drive bays (*NVMe support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 PCIe 4.0 x2 NVMe slots (M-key 2280/22110)
Expansion Slots	PCI-Express (PCIe) Configuration: Default <ul style="list-style-type: none"> • 1 PCIe 5.0 x8 (in x8) HHHL slot • 3 PCIe 5.0 x16 (in x16) HHHL slots M.2: 2 M.2 PCIe 4.0 x2 NVMe slots (M-key 2280/22110)
On-Board Devices	NVMe: NVMe; RAID 0/1 support Chipset: System on Chip Network Connectivity: No NIC option supported
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 3.0 ports(rear) Video: 1 VGA port

(Front View – System)

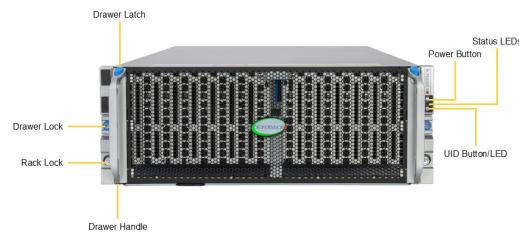

(Rear View – System)

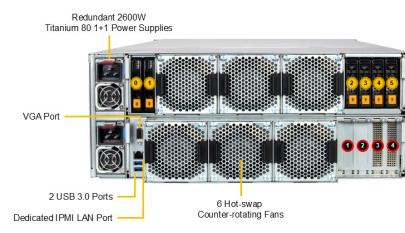

Slot	Description	Drive Bay	Description
1 – 4	PCIe 5.0 x16	Hot-swap 2.5" PCIe 4.0 x2 NVMe Drive Bays	
5 – 8	PCIe 5.0 x8 ¹	Optional Hot-swap 2.5" PCIe 5.0 x4 NVMe Drive Bays	

¹Depended by SAS Controller**System Cooling**

Fans: Up to 1 Counter Rotating 6cm Fan(s)
Up to 6 Heavy Duty 8cm Fan(s)

Power Supply

2x 2600W Redundant (1 + 1) Titanium Level (96%) power supplies

System BIOS

BIOS Type: AMI 64MB SPI Flash

Management

SuperCloud Composer®; Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!

PC Health Monitoring

CPU: Monitors for CPU Cores, Chipset Voltages, Memory
FAN: Fans with tachometer monitoring
Status monitor for speed control
Pulse Width Modulated (PWM) fan connectors
Temperature: Monitoring for CPU and chassis environment
Thermal Control for fan connectors

Dimensions and Weight

Weight: Gross Weight: 225 lbs (102.06 kg)
Net Weight: 130 lbs (58.97 kg)
Available Color: N/A

Operating Environment

Operating Temperature: 10°C to 35°C (50°F to 95°F)
Non-operating Temperature: -40°C to 70°C (-40°F to 158°F)
Operating Relative Humidity: 8% to 90% (non-condensing)
Non-operating Relative Humidity: 5% to 95% (non-condensing)

Motherboard

[Super X14SBSC](#)

Chassis

CSE-947HTS-R2K63P