

Twin SuperServer SYS-120TP-DC8TR

1U 2-node TwinPro with 4 2.5" SAS/SATA drives per node



More details here

Key Applications

High Performance Computing, Hyper-Converged Infrastructure, Big Data / Big Science,

Key Features


- Two **hot-pluggable** systems (nodes) in a 1U form factor. Each node supports the following:;
- Dual Socket P+ (LGA-4189) 3rd Generation Intel® Xeon® Scalable Processors;
- Intel® C621A Chipset;
- 16 DIMMs, Up to 4TB 3DS ECC DDR4-3200 LRDIMM/RDIMM;
- 1 PCIe 4.0 x16 (LP), 1 PCIe 4.0 x8 (with M.2 adapter installed for support 2 NVME up to 22x80 mm);
- Intel® X710 Dual port 10GbE-T LAN onboard;
- 4x 2.5" hot-swap SATA/SAS drive bays;
- 6 counter-rotating 4cm PWM fans with optimal fan speed control (Per System);
- Two 1000W redundant power supplies with PMBus;
- ASPEED AST2600 BMC, 2 USB, VGA, RoT

Broadcom® 3808 SAS (12Gbps); 4 slots per node; HBA only, no RAID support:;




Form Factor	1U Rackmount Enclosure: 438 x 43 x 718mm (17.25" x 1.7" x 28.25") Package: 752 x 203 x 975mm (29.6" x 8" x 38.4")
Processor	Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 32C/64T; Up to 48MB Cache per CPU
System Memory	Slot Count: 16 DIMM slots Max Memory (2DPC): Up to 4TB 3200MT/s ECC DDR4 RDIMM
Drive Bays Configuration	Default: Total 4 bays • 4 front hot-swap 2.5" SAS/SATA drive bays
Expansion Slots	Default • 1 PCIe 4.0 x16 LP slot
On-Board Devices	Chipset: Intel® C621A Network Connectivity: 2 RJ45 10GbE-T with Intel® X710-AT2
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 3.0 ports(rear) Video: 1 VGA port

(Front View – System)

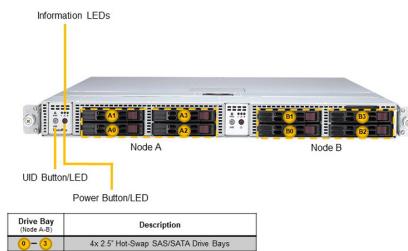

(Rear View – System)

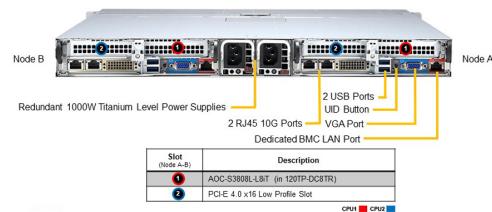

System Cooling

Fans: Up to 6x 4cm heavy duty fans with optimal fan speed control
 Air Shroud: 2 Air Shrouds

Power Supply

1x 1000W Redundant Titanium Level (96%) power supply

System BIOS

BIOS Type: AMI 32MB SPI Flash EEPROM

Management

SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!

PC Health Monitoring

CPU: 5 Phase-switching voltage regulator
 Monitors for CPU Cores, Chipset Voltages, Memory
 FAN: Fans with tachometer monitoring
 Pulse Width Modulated (PWM) fan connectors
 Status monitor for speed control
 Temperature: Monitoring for CPU and chassis environment
 Thermal Control for fan connectors

Dimensions and Weight

Weight: Gross Weight: 48.1 lbs (21.9 kg)
 Net Weight: 33.5 lbs (15.2 kg)
 Available Color: Black front & silver body

Operating Environment

Operating Temperature: 10°C to 35°C (50°F to 95°F)
 Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)
 Operating Relative Humidity: 8% to 90% (non-condensing)
 Non-operating Relative Humidity: 5% to 95% (non-condensing)

Motherboard

[Super X12DPT-PT6](#)

Chassis

[CSE-809H-R1K05P3](#)